




WET OUT YOUR LINER USING
THE ERGONOMIC HAND WHEEL
OR CONNECT A POWER DRILL



EVENLY SATURATES
LINER WITH RESIN TO
PREVENT WASTE



COMPACT SIZE FITS ON YOUR TRUCK AND IS JOBSITE FRIENDLY

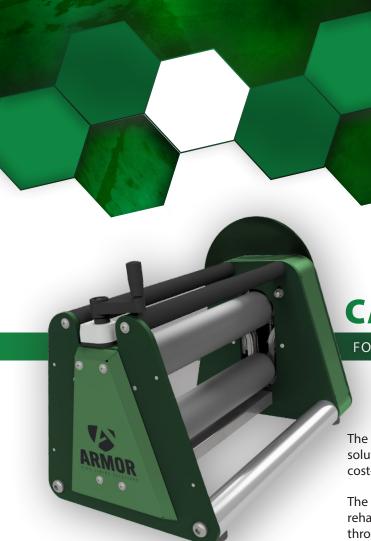



FOR PRECISE CALIBRATION OF RESIN IMPREGNATED LINERS

PRECISION FOR THE PROS.

The Armor® Calibration Unit Micro up to 8" is a comfortable, user-friendly solution in a new design. The smallest version features low weight, cost-optimized design and manual calibration without electrical components.

The roller spacing, which determines the wall thickness in the result of the rehabilitation, can be defined on the top of the unit with a handle. The pull-through speed is determined by the rotation speed of the handwheel or a cordless screwdriver. Rubber feet at the bottom always ensure that the unit remains in an optimal position. The micro impregnation system offers a manual yet precise impregnation combined with a minimum weight.

KEY FEATURES	
CORDLESS DRILL OPERATION	
MECHANIC GUARDS	ARMOR PROFITE TO STATE OF THE PARTY OF THE P
NON-STICK COATING	
SLIDING ROLLERS	

ARMOR® CALIBRATION UNIT - MICRO		
PART NUMBER	DESCRIPTION	
S1E-WO-MICRO	Calibration Unit Micro - Manual	

PRODUCT SPECIFICATIONS	
WEIGHT	42 lbs
SIZE (WxLxH)	22" x 13" x 15"
LINER DIMENSIONS	8"
ROLLER TABLE	No
VERSION	Mobile Version
PROTECTIVE COVER	No
ROLLER DRIVE	Manually or with cordless drill
HEIGHT ADJUSTMENT	Manually with handle



FREE IN-HOUSE DEMO WITH PURCHASE

Designed for individuals that have limited or no lateral lining experience.

1 day In-House classroom training and demonstration of equipment and materials.

Source One Environmental will provide all consumables and equipment for demonstration (along with meals).

Accommodations (travel fees, lodging, etc.) will be responsibility of the customer.



